
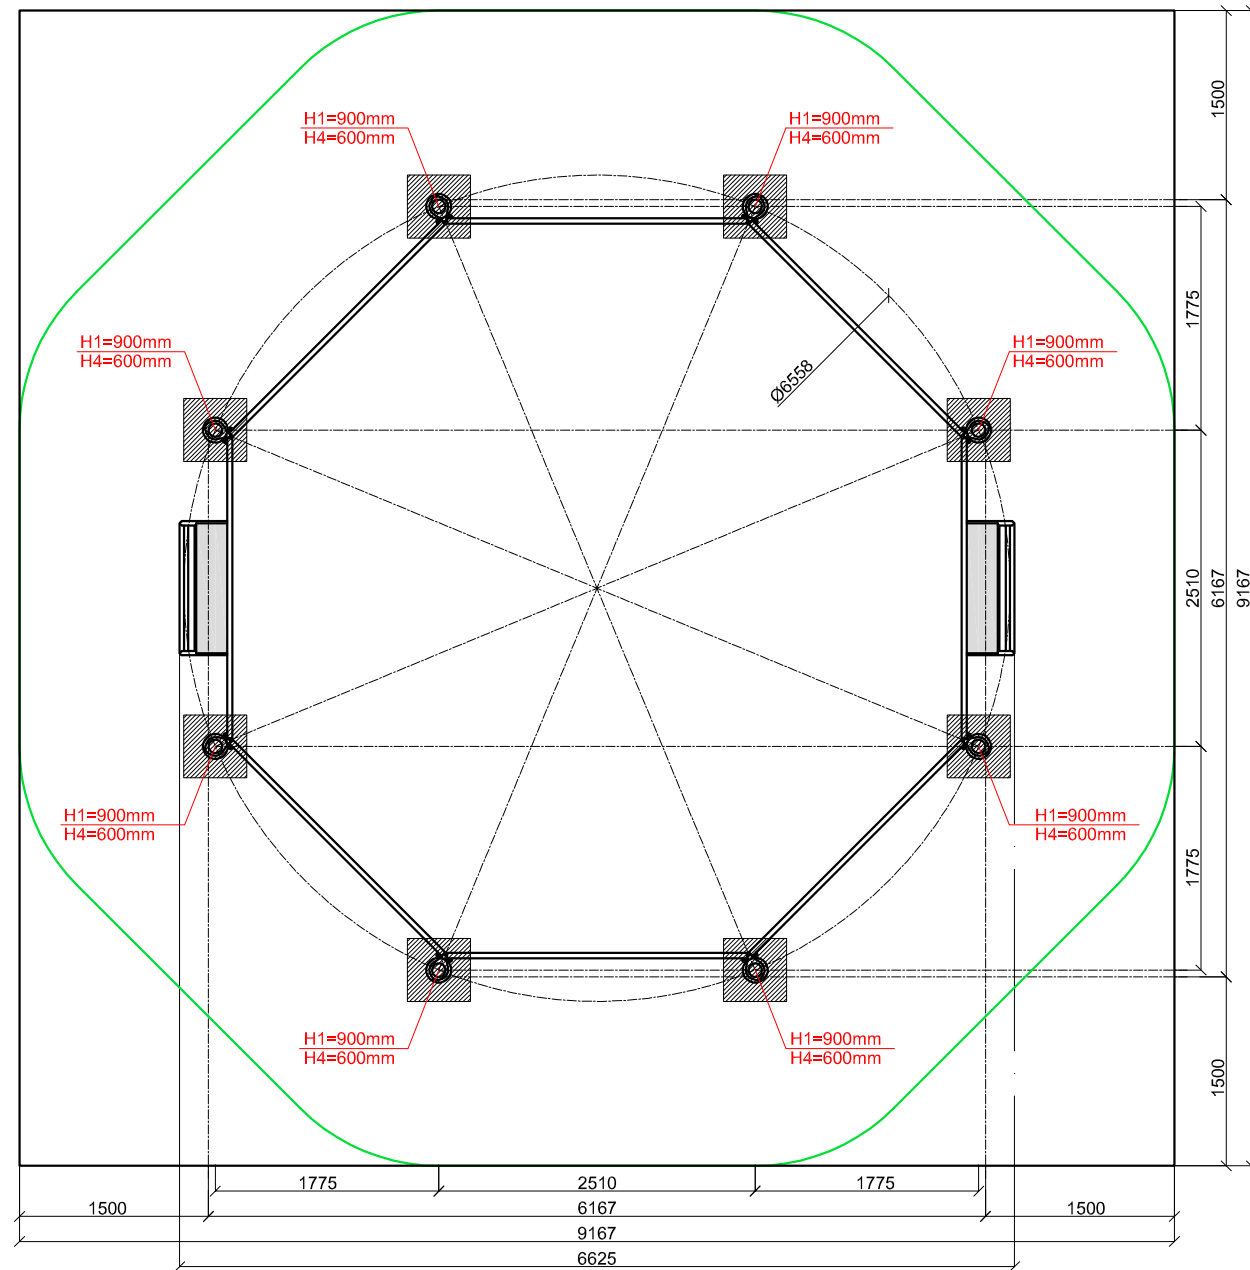
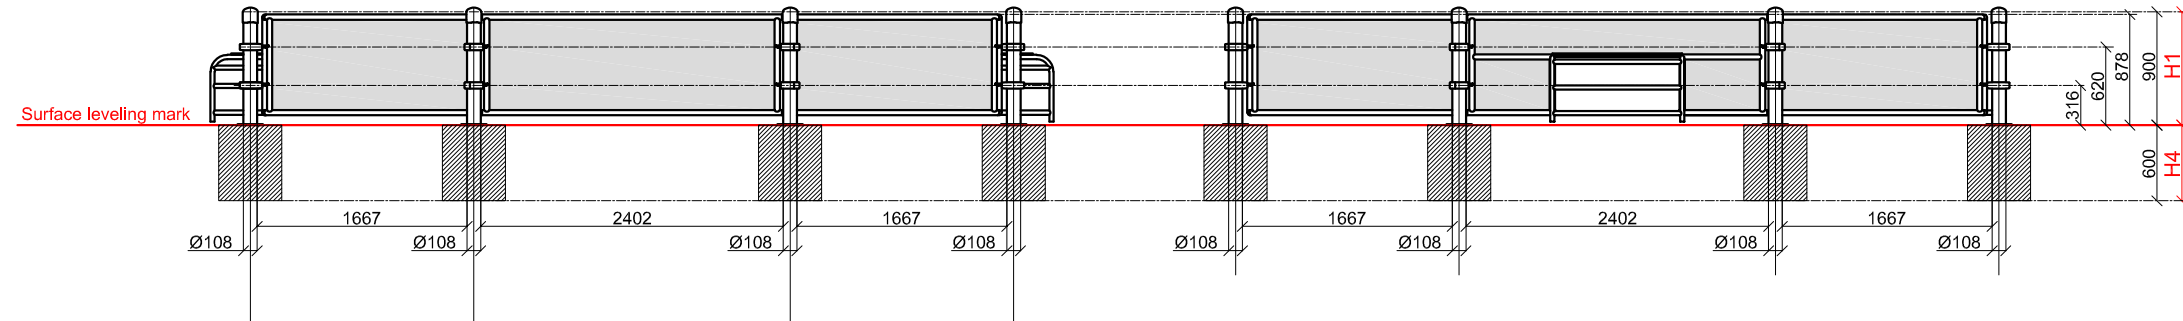


SCALE 1:60



**KENGURU
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S Luminor bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

KENGURU Panna football low HPL



The structure consists of eight vertical columns 900 mm in height and eight sections made of steel frame and heavy duty HPL. Height of each section is 800 mm, length - 2381 mm. The structure is secured together using siluminium clamps.

Installation instructions:

- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Ready-made C25 concrete should be used.
- Approximately 0,15 m³ concrete is needed for each spot foundation.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Technical information

width:	6167 mm	
height:	1650 mm	
length:	6625 mm	
largest part:	2381 mm	
weight:	900,0 kg	
floor space required:	9167 x 9167 mm	
pipe measurements:	diameter:	wall thickness:
	108 mm	3,2 mm
	42 mm	3,2 mm
	34 mm	3,2 mm
metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
metal clamps:	siluminium, powder coated RAL 5018 (turquoise blue)	
bolts for metal clamps:	stainless steel Pin Hex Button head security screws M10	
max. free fall height:	< 1578 mm	